




MIT-IVY

Technical Data Sheet

INPAST



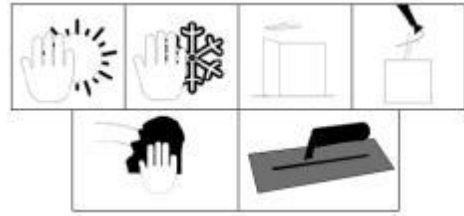



Acrylic Interior Paste







Description

Acrylic copolymer based, ready to use, flexible, filler and smoother paste for interior surfaces.

Application Areas

-  Concrete
-  Plaster
-  Ytong
-  Wood
-  Mineral surface
-  Old painted surface

Feature and Benefits

-  It has high resistance against water, humidity and impacts. It shows excellent adhesion on the substrates because of pure acrylic binder.
-  Time and labor saving due to application easiness.
-  Cracks are filled easily and paint consumption is reduced.
-  Water based, human and environment friendly. High water vapor permeability, allowing building to breathe.

Technical Information

Content	Acrylic emulsion
Color	White
Appearance	Viscous paste
Consumption	0,700 - 1,500 kg / m ²
Recommended Coat	2 coats
Application Tools	Trowel
Drying Time	6 hours to touch 24 hours to full cure



INPAST

Acrylic Interior Paste

Preparation of substrate

1 kg. **PRIMEC 1/7** Concentrated Primer is diluted with 5 kg. water and applied with brush or roller.

Application

The surfaces should be in a solid, clean, and dry state. Paste should be applied 2 coats. Recommended that, diluted primer (in the ratio of 1/10) should be applied on first coat paste application. **PRIMEC 1/7** Concentrated Primer can be applied before solvent based topcoats with diluted water in the ratio of 1/15.

Packaging

25 kg / 5 kg plastic bucket

Shelf Life

12 months in original, unopened package






Storage

Store in dry area between +5°C and +35°C. Protect from heat, freezing and direct sunlight.

Cleanup Information

Clean tools and equipment with water immediately after use. Dried material can only be removed mechanically.

Cautions / Limitations

-  Before application on the concrete and plaster, 4 weeks needed for setting time of cement.
-  Do not apply in freezing conditions or during precipitation.
-  Application should not be performed in rainy season, rainy days or if rain is expected after the application.
-  Use paper tape if you would apply the product in several colors or will not cover the entire surface: otherwise the surface might suffer color variations.
-  Mosaic Plaster gets final color and appearance in 2-3 hours after application.








MIT-IVY

Technical Data Sheet

INPAST

Acrylic Interior Paste

-  Using same Batch Number and Product Date products to avoid tonality differences at each application.
-  Protect applied materials from rain, freezing, foot traffic and continuous high humidity until completely dry.
-  Do not use when air and surface temperatures are below +0°C and above +35°C.
-  Avoid heavy traffic for 24 hours.
-  Allow 4 weeks before washing or cleaning for full cure.

Health and Safety

Warning! Cause eye and skin irritation. If eye contact, flush eyes with water for several minutes and remove contacts if present and easy to do. Get immediate medical attention. If skin contact; wash skin with plenty of soap and water. Get immediate medical attention. If swallowed, do not induce vomiting. Call a physician or poison control center. Never give anything by mouth to an unconscious person.

Wash hands thoroughly after handling. Wear protective clothing, gloves, eye and face protection. Do not eat, drink or smoke when using this product. Take off contaminated clothing and wash it before reuse. Dispose of unused, contents, container and other contaminated wastes in accordance with local, state, federal and provincial regulations.

Keep container closed when not in use. Keep out of the reach of children.

Limited Warranty: This product is subject to a written limited warranty which can be obtained free of charge from BAUMERK Company. Please contact with technical service department for further information and support.

MIT-IVY INDUSTRY CO.,LTD

Chemical Industry Park, 69 Guozhuang Road, Yunlong District, Xuzhou City, Jiangsu Province, China 221100

TEL: 0086-13805212761 FAX:0086-0516-83769139

<https://www.mit-ivy.com>