




DECOPUTZ

Decorative Coating



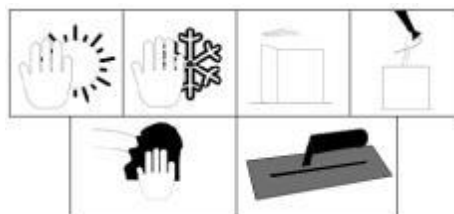




Description

Acrylic emulsion-based, silicone added, ready to use colored plaster. 1,5 thickness and 2 mm thickness application types are available.

Application Areas

Applied as a final coating on exterior thermal insulation systems and on facades of all buildings.

Feature and Benefits

-  Applicable on exterior thermal insulation systems.
-  Allows the substrate to breath.
-  Resistant to external factors.
-  Water- repellent.
-  Resistant to weathering conditions and water.

Technical Information

Content	Acrylic emulsion
Color	Most colors
Appearance	Viscous liquid
Water Vapor Permeability	Class V2
Water Transmission	Class W3
Particle Size	Class S4
Crack Bridging	Class A0
Carbon dioxide Permeability	Class C0
Weight Solid	90±2%
Thinning	Ready to use
Consumption	1,5 mm thickness application; 2,5 - 3 kg / m ² 2 mm thickness application; 3,5 – 4 kg / m ²
Recommended Coat	1 coat
Application Tools	Trowel
Drying Time	4 hours to touch 36 hours to full cure



DECOPUTZ

Decorative Coating

Preparation of substrate

The surface should be clean, dry, smooth and sound. The substrate failure should be repaired with **EXPAST** Acrylic Exterior Paste and waited 72 hours for curing.

Application

In order to provide better adhesion on the substrate, **PRIME-EX** Exterior Primer is applied until surface of saturation. **DECOPUTZ** Decorative Coating should be mixed until it reaches a homogenous state. **DECOPUTZ** Decorative Coating should be spread on the substrate with stainless steel or plastic trowel uniquely. The application thickness should be adjusted according to the biggest pattern stone. Patterns should be applied on the substrate with circular movements with plastic trowel.

Packaging

25 kg plastic bucket

Shelf Life

12 months in original, unopened package




Storage

Store in dry area between +5°C and +35°C. Protect from heat, freezing and direct sunlight.

Cleanup Information

Clean tools and equipment with water immediately after use. Dried material can only be removed mechanically.

Cautions / Limitations

-  Before application on the concrete and plaster, 4 weeks needed for setting time of cement.
-  Using same Batch Number and Product Date products to avoid tonality differences at each facade.
-  Do not overcoat with solvent based materials.








MIT-IVY

Technical Data Sheet

DECOPUTZ

Decorative Coating

-  Do not apply in freezing conditions or during precipitation.
-  Protect applied materials from rain, freezing, foot traffic and continuous high humidity until completely dry.
-  Do not use when air and surface temperatures are below 0°C and above +35°C.
-  Avoid heavy traffic for 24 hours.
-  Allow 4 weeks before washing or cleaning for full cure.

Health and Safety

Warning! Cause eye and skin irritation. If eye contact, flush eyes with water for several minutes and remove contacts if present and easy to do. Get immediate medical attention. If skin contact; wash skin with plenty of soap and water. Get immediate medical attention. If swallowed, do not induce vomiting. Call a physician or poison control center. Never give anything by mouth to an unconscious person.

Wash hands thoroughly after handling. Wear protective clothing, gloves, eye and face protection. Do not eat, drink or smoke when using this product. Take off contaminated clothing and wash it before reuse. Dispose of unused, contents, container and other contaminated wastes in accordance with local, state, federal and provincial regulations.

Keep container closed when not in use. Keep out of the reach of children.

Limited Warranty: This product is subject to a written limited warranty which can be obtained free of charge from BAUMERK Company. Please contact with technical service department for further information and support.

MIT-IVY INDUSTRY CO.,LTD

Chemical Industry Park, 69 Guozhuang Road, Yunlong District, Xuzhou City, Jiangsu Province, China 221100

TEL: 0086-13805212761 FAX:0086-0516-83769139

<https://www.mit-ivy.com>