




MIT-IVY

Technical Data Sheet

PRIME-IN



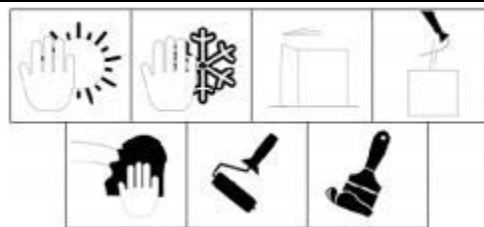

Acrylic Primer



Description

Ready to use, transparent, plaster surface primer.

Application Areas

-  Plaster and gypsum
-  Limewhite
-  Old plastic painted surface
-  Gas concrete

Feature and Benefits

Applied as a primer on high porosity and absorptivity interior walls of buildings that the purpose of increasing adherence and reducing consumption of final layer paint and coating.

Technical Information

Content	Acrylic emulsion
Color	Clear
Appearance	Liquid
Particle Size	Class S1
Solid Content	10±1 %
Thinning	Ready to use
Consumption	0,080 – 0,120 L / m ²
Recommended Coat	1 coat
Application Tools	Roller / Brush
Drying Time	2 hours to touch 6 hours to topcoat

Preparation of substrate

The surface should be cleaned out of dirt, grease, old loose or flaking materials. The old paints must be sanded and removed. **PRIME-IN** Acrylic Primer should be applied after removed dust.



MIT-IVY

Technical Data Sheet

PRIME-IN

Acrylic Primer

Application

PRIME-IN Acrylic Primer is ready to use and does not need to dilution. Primer should be applied as one layer with roller or brush. Paint application should be started at least 6 hours later, after the application of primer.

Packaging

20 L / 5 L plastic drum

Shelf Life

12 months in original, unopened package




Storage

Store in dry area between +5°C and +35°C. Protect from heat, freezing and direct sunlight.

Cleanup Information

Clean tools and equipment with water immediately after use. Dried material can only be removed mechanically.

Cautions / Limitations

-  Do not apply in freezing conditions or during precipitation.
-  Protect applied materials from rain, freezing, foot traffic and continuous high humidity until completely dry.
-  Do not use when air and surface temperatures are below 0°C and above +35°C.

Health and Safety

Warning! Cause eye and skin irritation. If eye contact, flush eyes with water for several minutes and remove contacts if present and easy to do. Get immediate medical attention. If skin contact; wash skin with plenty of soap and water. Get immediate medical attention. If swallowed, do not induce



— MIT-IVY —

Technical Data Sheet

PRIME-IN

Acrylic Primer

vomiting. Call a physician or poison control center. Never give anything by mouth to an unconscious person.

Wash hands thoroughly after handling. Wear protective clothing, gloves, eye and face protection. Do not eat, drink or smoke when using this product. Take off contaminated clothing and wash it before reuse. Dispose of unused, contents, container and other contaminated wastes in accordance with local, state, federal and provincial regulations.

Keep container closed when not in use. Keep out of the reach of children.

Limited Warranty: This product is subject to a written limited warranty which can be obtained free of charge from BAUMERK Company. Please contact with technical service department for further information and support.

MIT-IVY INDUSTRY CO.,LTD

Chemical Industry Park, 69 Guozhuang Road, Yunlong District, Xuzhou City, Jiangsu Province, China 221100

TEL: 0086-13805212761 FAX:0086-0516-83769139

<https://www.mit-ivy.com>